


260 Main Street



260 Main Street Front View

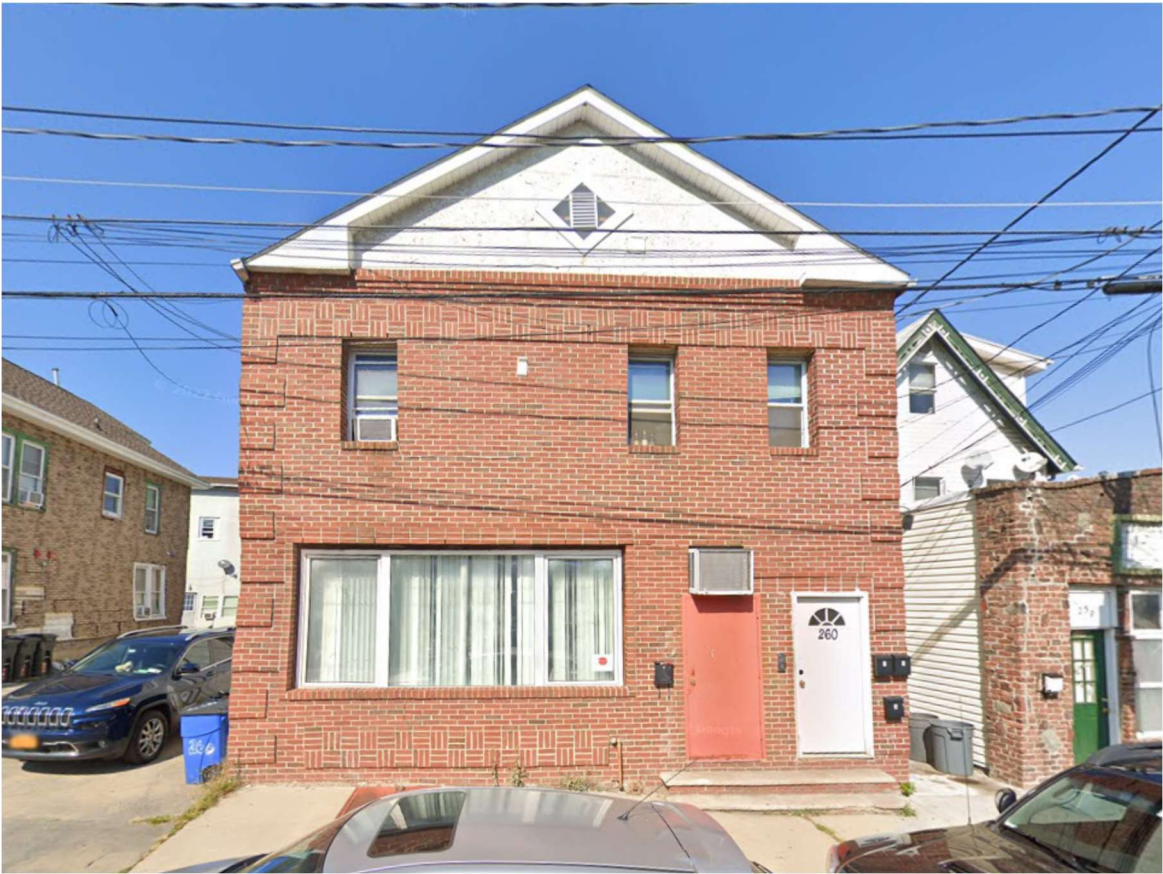

260 Main Street West side view





258 Main Street – Neighbor to the East



262A (front) & 262B (rear) Main Street – Neighbor to the West






View across Main Street. Former site of 249 and 259 Main Street




247 Main Street

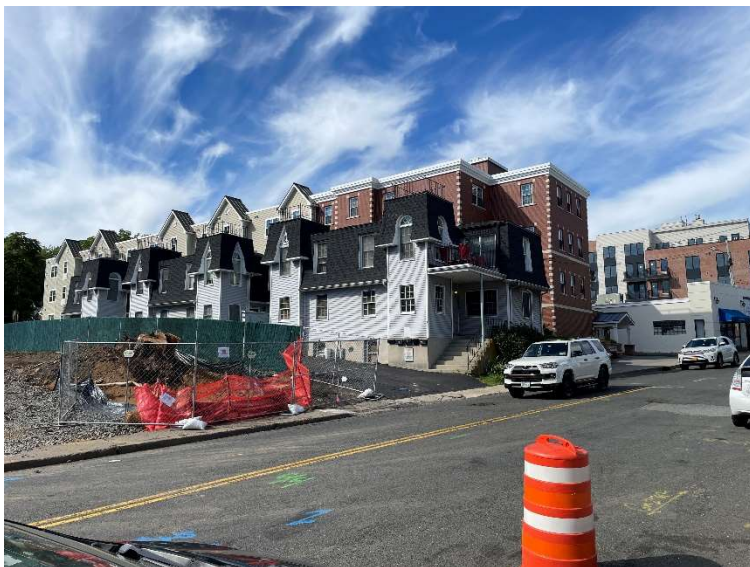

261 Main Street





[HomeExterior Doors](#)

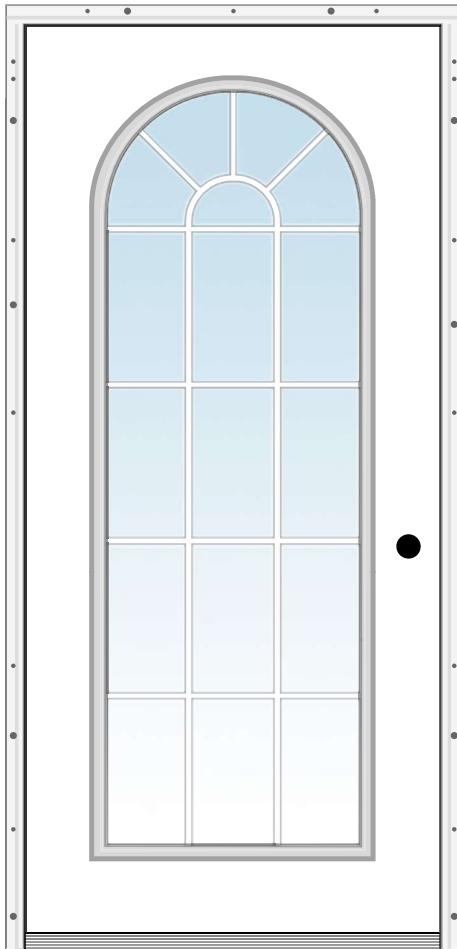






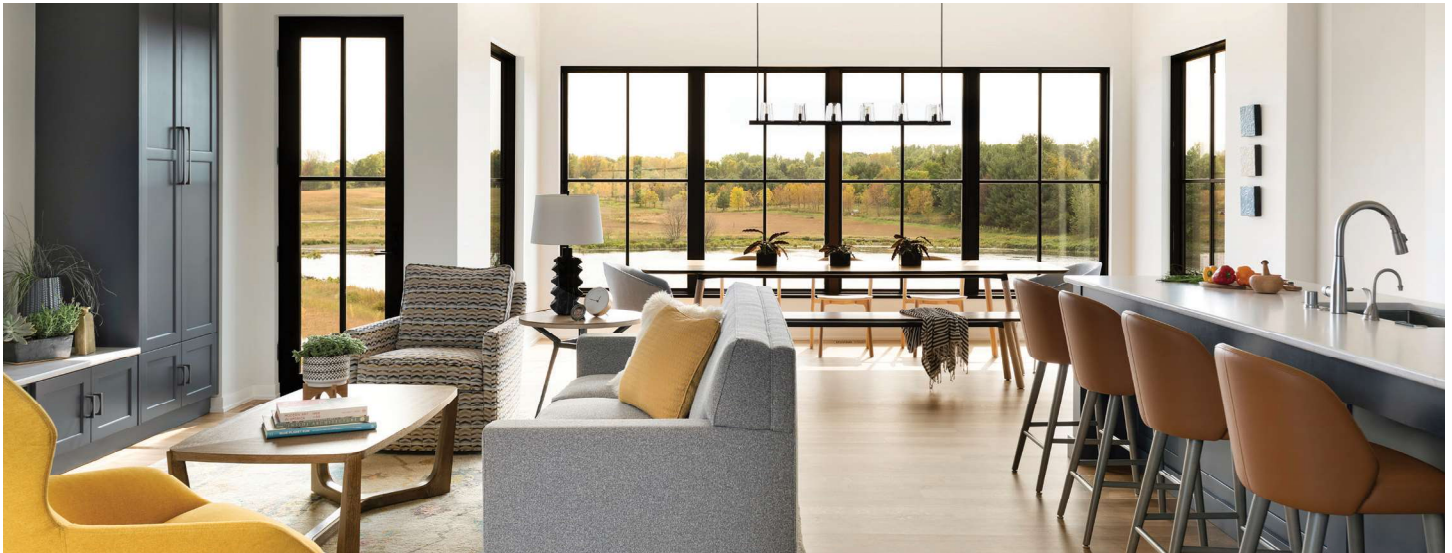

### FULL DIVIDED LIGHT


For an authentic look, full divided light grilles are permanently applied to the interior and exterior of the window with a spacer bar between the glass.



### FULL DIVIDED LIGHT WITH ENERGY SPACER


Full Divided light with energy spacer has grilles that are permanently applied to the interior and exterior of the window. The narrow spacer bar minimizes transfer of heat and cold to the interior surface, improving the overall thermal performance. Products will have the same U-Factor, SHGC and visible transmission as they would with simulated divided light grilles.

Available on A-Series windows.




### SIMULATED DIVIDED LIGHT

Simulated divided light offers permanently applied grilles on the exterior and interior with no spacer bar between the glass.




### SIMULATED DIVIDED LIGHT WITH REMOVABLE INTERIOR GRILLES

Simulated divided light grilles have permanently applied grilles on the exterior and removable interior grilles for easy cleaning.



### FINELIGHT™ GRILLES-BETWEEN-THE-GLASS


Finelight™ grilles-between-the-glass are located between the panes of glass making windows and doors easy to clean. With a sculpted profile and a two-sided color scheme, they match both the interior and exterior of the window or door.



### FINELIGHT™ GRILLES-BETWEEN-THE-GLASS WITH PERMANENT EXTERIOR GRILLES

Finelight™ grilles-between-the-glass are located between the panes of glass making windows and doors easier to clean. The permanent grilles on the exterior provide architectural style and detail.

Available on 100 Series products.



### REMOVABLE INTERIOR GRILLES

Removable interior grilles are located on the room side glass surface and come off the glass for easy cleaning.



# SPECIALTY WINDOWS

## FEATURES

### FRAME

**A** Wood frame members are treated with a water-repellent preservative for long-lasting protection and performance. Radii are made of laminated pine, offering improved strength and appearance.

**B** The lineal sections of the jamb and sill on eyebrow, extended gothic, octagon, monumental, Flexiframe®, custom arch and arch windows are covered with a low-maintenance, fiberglass-reinforced composite. The arched head members and Springline™ units are covered with stretch-formed aluminum.


**C** The vinyl installation flange on eyebrow, extended gothic, octagon, monumental, Flexiframe, custom arch, arch and Springline units extends 1 1/4" (32) around the entire perimeter of the unit. It helps seal the unit to the structure.

**D** Circle, half circle, quarter circle, elliptical and oval windows are covered with a rigid vinyl cladding. Low-maintenance exterior cladding provides long-lasting beauty.

**E** Rigid vinyl cladding on circle, half circle, quarter circle, elliptical and oval window frames forms a full-perimeter installation flange for securing the unit to the structure. It also helps maintain an attractive appearance while minimizing maintenance.

**F** Inside trim stop is made of unfinished pine. Arched trim stops are made with quality, full-length laminated pine. Units are shipped with the trim stops tacked on, so removal is easy – expediting finishing and joining procedures.

**G** Unfinished interior wood glazing stops help secure the glass in place. Arched glazing stops are made with full-length laminated pine.

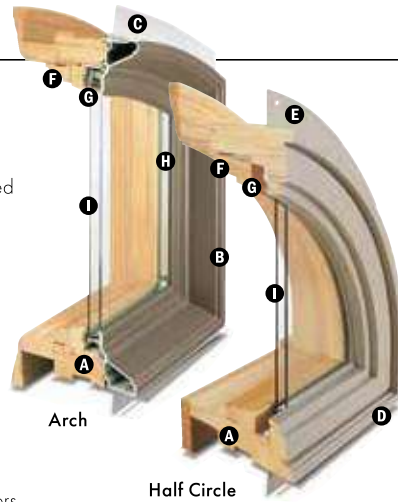

## EXTERIOR & INTERIOR OPTIONS

### EXTERIOR COLORS



### INTERIOR OPTIONS



### GLASS

**H** In addition to stainless steel glass spacers, black or white glass spacers are now available to allow the spacer to blend in with the unit color.

- I** High-Performance options include:
- Low-E4® glass
  - Low-E4 HeatLock® glass
  - Low-E4 SmartSun™ glass
  - Low-E4 SmartSun HeatLock glass
  - Low-E4 Sun glass

Tempered and other glass options are available. Contact your Andersen supplier.


A removable translucent film helps shield the glass from damage during delivery and construction, and simplifies finishing at the job site.

### Patterned Glass

Patterned glass options are available. See page 12 for more details.



Specialty windows are available with Stormwatch® Protection. Visit [andersenwindows.com/coastal](http://andersenwindows.com/coastal) for more details.

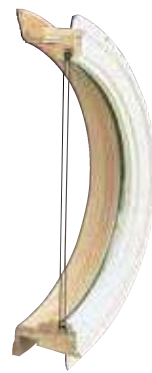

Circle/Oval



Springline™



Flexiframe®

\*Visit [andersenwindows.com/warranty](http://andersenwindows.com/warranty) for details.

\*\*Products with dark bronze and black interiors have matching exteriors.

Dimensions in parentheses are in millimeters.

Printing limitations prevent exact replication of colors. See your Andersen supplier for actual color samples.

Naturally occurring variations in grain, color and texture of wood make each window one of a kind. All wood interiors are unfinished unless a finish is specified.



# Warehouse 44 Arm Outdoor Wall Sconce

By Hi Lite

Warehouse 44 Arm Outdoor Wall Sconce  
By Hi Lite

## Product Options

Finish: Black,  
Size: 16 in,  
Wire Guard: Without

## Details

Material: Aluminum  
Dimmable when used with a Standard Dimmer (Not Included)  
UL Listed Wet  
Made In USA

## Dimensions

16 in Option Backplate: Diameter 4.75"  
16 in Option Fixture: Width 16", Height 8.75", Depth  
19.5", Weight 7Lbs

## Lighting

16 in

Lamp Type	Incandescent
Total Lumens	2850.0
# of Bulbs	1 (Not Included)
Bulb Type	200W A23 E26
Volts	120
Color Temp	2700 (Warm)
Average Lifespan	2500.00
CRI	100
Equivalent Halogen, CFL or LED Bulb Can Be Used	Yes



Notes:

Prepared  
by:

Prepared for:  
Project:  
Room:  
Placement:  
Approval:

## Additional Details

Product URL:  
<https://www.lumens.com/warehouse-44-arm-outdoor-wall-sconce-by-hi-lite-HLC2004282.html>  
Rating: UL Listed Wet

ITEM#: HLC2004282